


# ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE
△*2	C	ECR #101230-37 EDIT LABEL,POLYBAG	01/03/11'

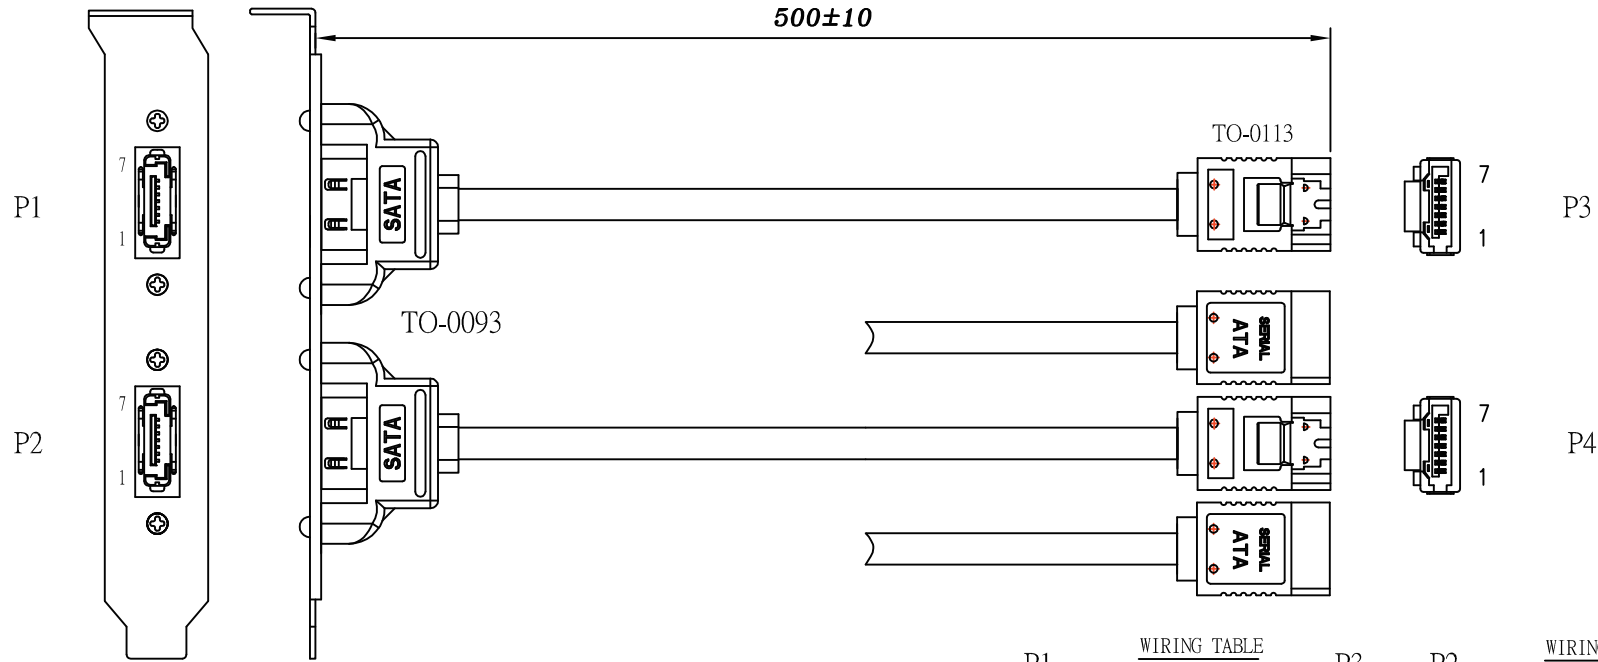

**NOTE:**

**1. CABLE:**

UL2725 80°C 30V [26AWG(1/0.404 T.C)\*2F  
+AL/MY+DRAIN WIRE(1/0.32 T.C)\*2]  
INS: FOAM-PE OD:  $\phi 1.1 \pm 0.05$ mm  
PVC JACKET OD:  $\phi(2.2 \pm 0.1) * (7.8 \pm 0.2)$ mm COLOR: RED (PANTONE 200C)  
IMPEDANCE:  $100 \pm 5$  OHM

**2. CONNECTOR:**

P1 & P2: SATA II 7P RIVETING TYPE PBT BLACK G/F W/METAL SHELL  
P3 & P4: SATA 7P CRIMP TYPE GOLD FLASH CONTACT,  
W/METAL LATCH


**3. HOOD: MOLDED TYPE, PVC 45P, COLOR: BLACK(NK-K01)**

**4. CABLE ASS'Y ELECTRICAL TEST:**

- 4-1 100% OPEN SHORT & MIS WIRE TEST
- 4-2 CONTACT RESISTANCE 3 OHM MAX
- 4-3 INSULATION RESISTANCE 10M OHM MIN

**5. PACKING: SEE P-0210, EACH PC / POLYBAG + EAN CODE LABEL**


△ EAN CODE: 4260113564141

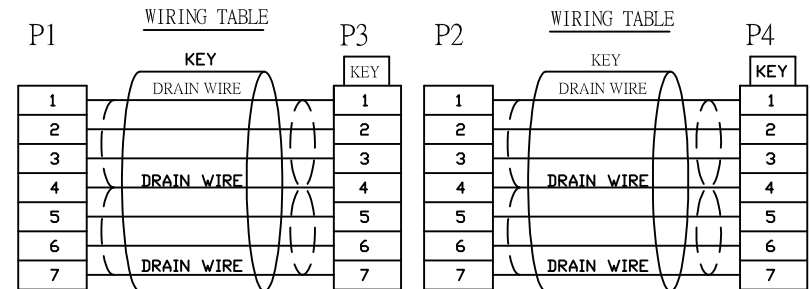

Tolerance Inch M/M			<b>2Direct GmbH</b>			
.X	.015	.30				
.XX	.010	.10	Title			
.XXX	.005	.05	SATA II 7P*2 W/BRACKET - SATA I 7P*2 W/METAL LATCH CABLE			
Draw			Customer P/N: CS0006			
FANNIE 01/03/11'			App'd		Customer:	
Check			Scale	NONE	Units	m/m
Engr			Third Angle Projection			
			Dwg No. 140-1466		REV: C	Sheet 1/2

LTR	REV.	DESCRIPTION	DATE
△*2	C	ECR #101230-37 EDIT LABEL,POLYBAG	01/03/11'



POLYBAG 

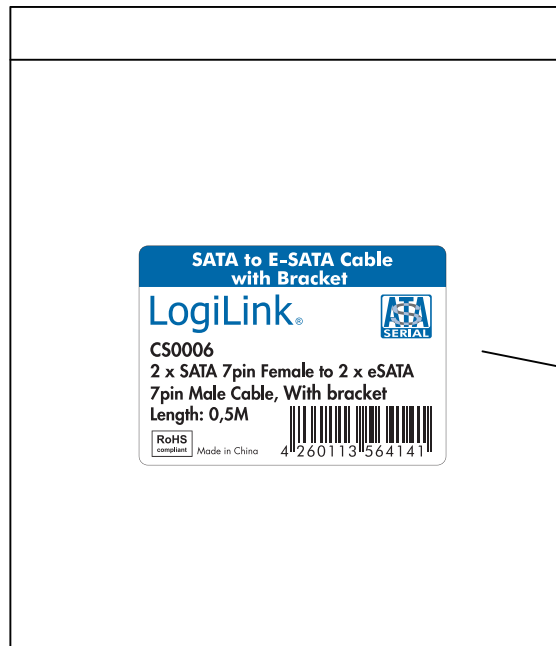


LABEL POSITION IN THE MIDDLE

R2x4PCS

BAR CODE LABEL 

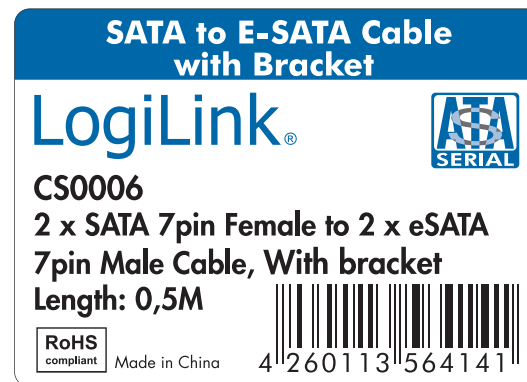

Pantone 2945C, Black  
Size: 70 x 50 mm R= 2mm

Tolerance Inch M/M			<b>2Direct GmbH</b>				
.X	.015	.30					
.XX	.010	.10	Title SATA II 7P*2 W/BRACKET - SATA I 7P*2 W/METAL LATCH CABLE				
.XXX	.005	.05					
Draw FANNIE 01/03/11'			Customer P/N: CS0006				
Check			App'd		Customer:		
Engr			Scale	NONE	Units	m/m	Third Angle Projection 
			Dwg No. 140-1466		REV: C	Sheet 2/2	