

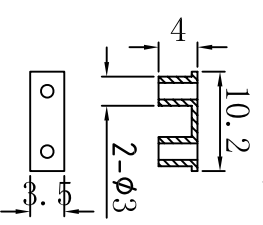
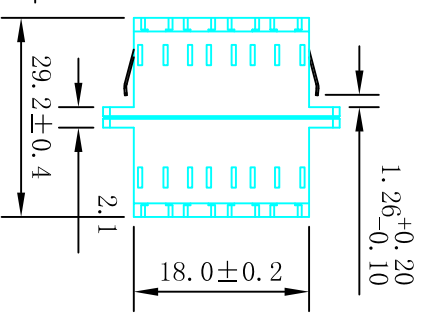


Insertion Loss (dB)	≤0.30
Operating Temperature (° C)	-40 ~ +85
Storage Temperature (° C)	-40 ~ +85

NOTE:  
ROSH COMPLIANT

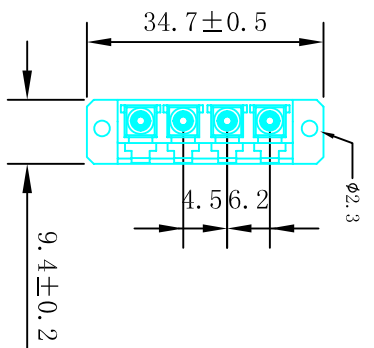

**MATERIAL LIST:**

⑥	LC Aqua Body Quad (SC Duplex footprint)	1pcs	
⑤	LC Sleeve ceramic (Multi-Mode)	4pcs	
④	Aqua bush	2pcs	
③	LC Aqua Body Quad (SC Duplex footprint)	1pcs	
②	Metal Mount	1pcs	
①	LC White Dustcap	8pcs	
NO.		QT' Y	REMARK

**LogiLink Professional**

NEW		2010-10-27		A	
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	
PRODUCT NAME		ITEM NO.		UNIT MM	
DRAWNBY		CHECKBY		APPOBY	
DATE		DATE		DATE	
2010-10-27		2010-10-27		2010-10-27	