



## Two-sectioned Wall-mounted Cabinet

### Technical Features

Material:	1-1.2 mm steel
Maximum Static Load:	Up to 100 kg
Finish:	Electrostatic powder paint
Color:	RAL 7035 light grey or RAL 9005 black

### Standard Configuration

- Steel frame
- Glass door with cylindrical lock
- Accessible from rear side with double hinged design
- 1 Pair of heavy duty 19" Mounting Rails
- RoHS compliant, UL and Gost-R certificated




\* The specifications and pictures are subject to change without notice.  
\*All trade names referenced are the registered namework of their respective owners.

## Two-sectioned Wall-mounted Cabinet - RAL 9005 Black

Height U	Outer Width (W) mm	Outer Depth (D) mm	Outer Height (H) mm	Inner Height (h1) mm	Inner Width (w1) mm	Inner Depth (d1) mm	19" Rails Adjustable Depth Range (c) mm	Weight kg	Part No.	EAN Code
6U	600	300+150	366	266	530	260+120	110-205	20.23	W06D65B	8698800000768
6U	600	500+150	366	266	530	460+120	110-405	22.40	W06D67B	8698800000782
9U	600	300+150	500	400	530	260+120	110-205	29.93	W09D65B	8698800000805
9U	600	500+150	500	400	530	460+120	110-405	32.44	W09D67B	8698800000829
12U	600	300+150	632	532	530	260+120	110-205	38.67	W12D65B	8698800000843
12U	600	500+150	632	532	530	460+120	110-405	42.87	W12D67B	8698800000867
15U	600	300+150	766	666	530	260+120	110-205	46.34	W15D65B	8698800000881
15U	600	500+150	766	666	530	460+120	110-405	52.61	W15D67B	8698800000905
18U	600	300+150	900	800	530	260+120	110-205	55.46	W18D65B	8698800000928
18U	600	500+150	900	800	530	460+120	110-405	62.90	W18D67B	8698800000948
21U	600	300+150	1034	934	530	260+120	110-205	64.67	W21D65B	8698800000966
21U	600	500+150	1034	934	530	460+120	110-405	72.43	W21D67B	8698800000980

## Two-sectioned Wall-mounted Cabinet - RAL 7035 Light Grey

Height U	Outer Width (W) mm	Outer Depth (D) mm	Outer Height (H) mm	Inner Height (h1) mm	Inner Width (w1) mm	Inner Depth (d1) mm	19" Rails Adjustable Depth Range (c) mm	Weight kg	Part No.	EAN Code
6U	600	300+150	366	266	530	260+120	110-205	20.23	W06D65G	8698800000751
6U	600	500+150	366	266	530	460+120	110-405	22.40	W06D67G	8698800000775
9U	600	300+150	500	400	530	260+120	110-205	29.93	W09D65G	8698800000799
9U	600	500+150	500	400	530	460+120	110-405	32.44	W09D67G	8698800000812
12U	600	300+150	632	532	530	260+120	110-205	38.67	W12D65G	8698800000836
12U	600	500+150	632	532	530	460+120	110-405	42.87	W12D67G	8698800000850
15U	600	300+150	766	666	530	260+120	110-205	46.34	W15D65G	8698800000874
15U	600	500+150	766	666	530	460+120	110-405	52.61	W15D67G	8698800000898
18U	600	300+150	900	800	530	260+120	110-205	55.46	W18D65G	8698800000911
18U	600	500+150	900	800	530	460+120	110-405	62.90	W18D67G	8698800000935
21U	600	300+150	1034	934	530	260+120	110-205	64.67	W21D65G	8698800000959
21U	600	500+150	1034	934	530	460+120	110-405	72.43	W21D67G	8698800000973

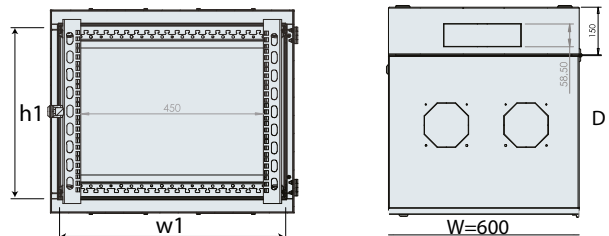

\* The specifications and pictures are subject to change without notice.  
 \*All trade names referenced are the registered trademark of their respective owners.